



- 7) Open Stata and the data editor window by typing `edit` in the command line.
This is how an empty Stata edit windows looks like

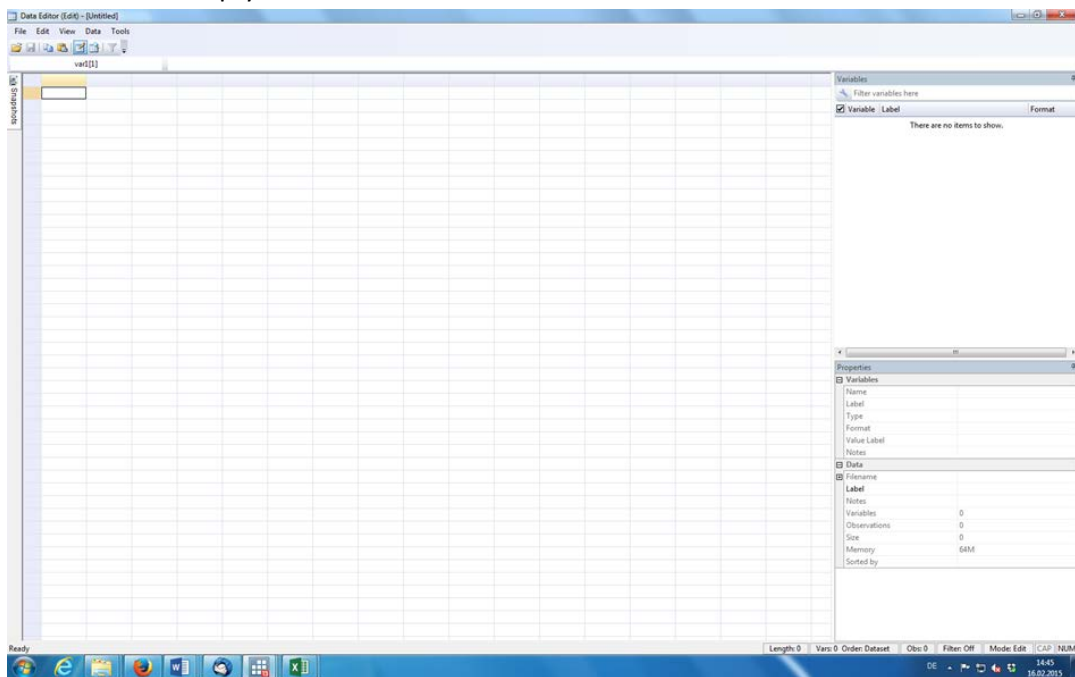

- 8) After inserting (use “treat first row as variable names”) it looks like:

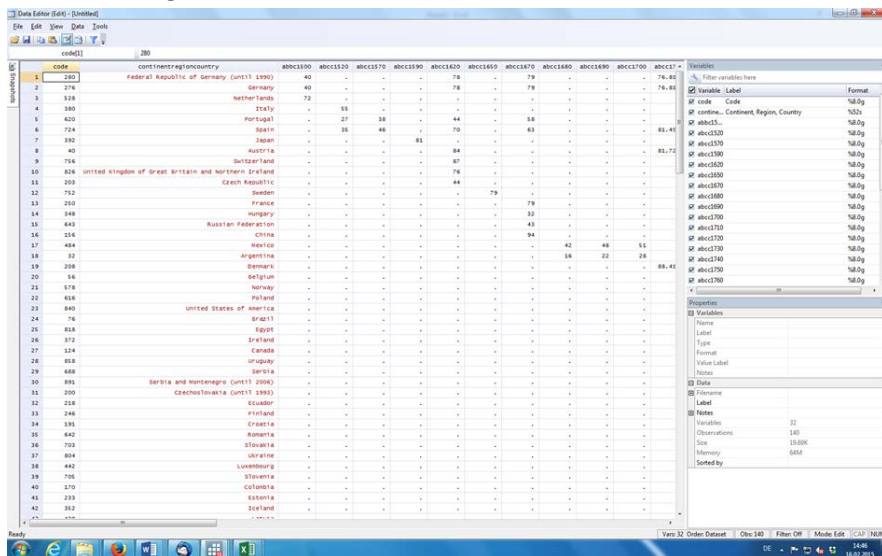

- 9) Insert: `drop code`
- 10) Insert: `ren continentregioncountry country`
- 11) Use the do-file: `r_intec_all.do` (to rename the country names by their abbreviations under the new variable “co”)
- 12) Insert: `drop country`
- 13) Insert: `drop if co==""`
- 14) Insert: `duplicates tag (co), generate(variablename)`
- 15) Insert: `drop if variablename==1`
- 16) Insert `drop variablename`
- 17) Insert: `reshape long 'var', i(co) j(bdec)`